



Proteus Lite

PIPELINE CRAWLER INSPECTION SYSTEM

INNOVATIVE
ALL-IN-ONE SYSTEM

DESIGNED FOR
RELIABLE
SELF-CONTAINED
INSPECTIONS





PROTEUS LITE

PROVEN RELIABILITY MODULAR CAPABILITY

Mini-Cam's NEW *Proteus Lite* brings together, the tried and trusted performance and reliability of the Proteus family, in a value for money, entry level system. Designed and developed in-house, Proteus Lite is the ideal starter kit for a one-man operation, integration into a small inspection van, or a low-cost option for larger companies to use for off-road, remote locations. Proteus Lite provides all the resources required to undertake efficient, easy to perform inspections, and with *ProPIPE+* and *WinCan Embedded* software as standard, you can deliver accurate, detailed reports, instantly on-site.

Rugged, flexible and intelligent, feature rich Proteus Lite takes your productivity to the next level, enhancing your business with a solid reputation for professional inspections and providing increased profitability from your investment. Future proof and totally modular, when your business budget allows, simply upgrade your Proteus Lite with a larger or smaller crawler, extra cameras and auxiliary lights, or one of the many other Proteus compatible accessories available.

Renowned throughout the industry, Proteus systems are making easy work out of challenging environments in 35 countries worldwide, performing rigorous pipeline inspections in harsh and remote conditions day-after-day, after-day. Rest assured that your business is in safe hands with Mini-Cam products, and we'll be right behind you with our enviable service and impeccable after-care.



www.minicam.co.uk

REEL

RMPL250

Designed in-house, this sturdy cable reel is Mini-Cam's latest innovation. The core of the *Lite* system, RMPL250 is engineered to the same exacting standards as our mainline Proteus equipment. Compact, space-saving design, robust construction with a powder coated finish, and equipped with easy-to-use features including a manually operated cable layering arm and meterage roller, which is easily removed for cleaning. The friction brake can be fully locked, unlocked or applied as a friction brake to avoid unwanted pay-off of the cable, and a sturdy winding handle folds away neatly to save space.

The cable reel comes complete with 250 metres of 6.5mm Kevlar reinforced cable, and sports our signature 'cow-horn' CCU locators, enabling a secure quick fit of the Proteus Lite control unit ready for work.

For added flexibility an optional Tilt Table (see page 17) allows adjustment of the control unit position, to give the user optimal screen viewing and keyboard positions.



UNIQUE COW-HORN LOCATORS FOR EASY-FIT CCU

METERAGE ROLLER REMOVABLE FOR EASY CLEANING

STURDY POWDER COATED FRAME WITH RUBBER FEET

SPRING LOADED CONNECTOR NO TOOLS REQUIRED

250m 6.8mm KEVLAR REINFORCED CABLE

FRICTION BRAKE

REMOVABLE SPACE-SAVING FOLD-AWAY HANDLE




Easy-fit Control Unit



Manual Cable Layering Arm



2-Step Quick Release Rollers

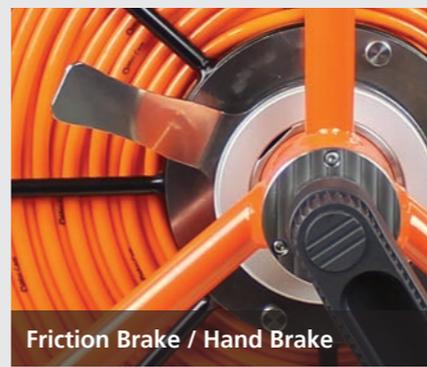

Friction Brake / Hand Brake




Sturdy Winding Handle




Fold-away Handle

CRAWLER

CPL150

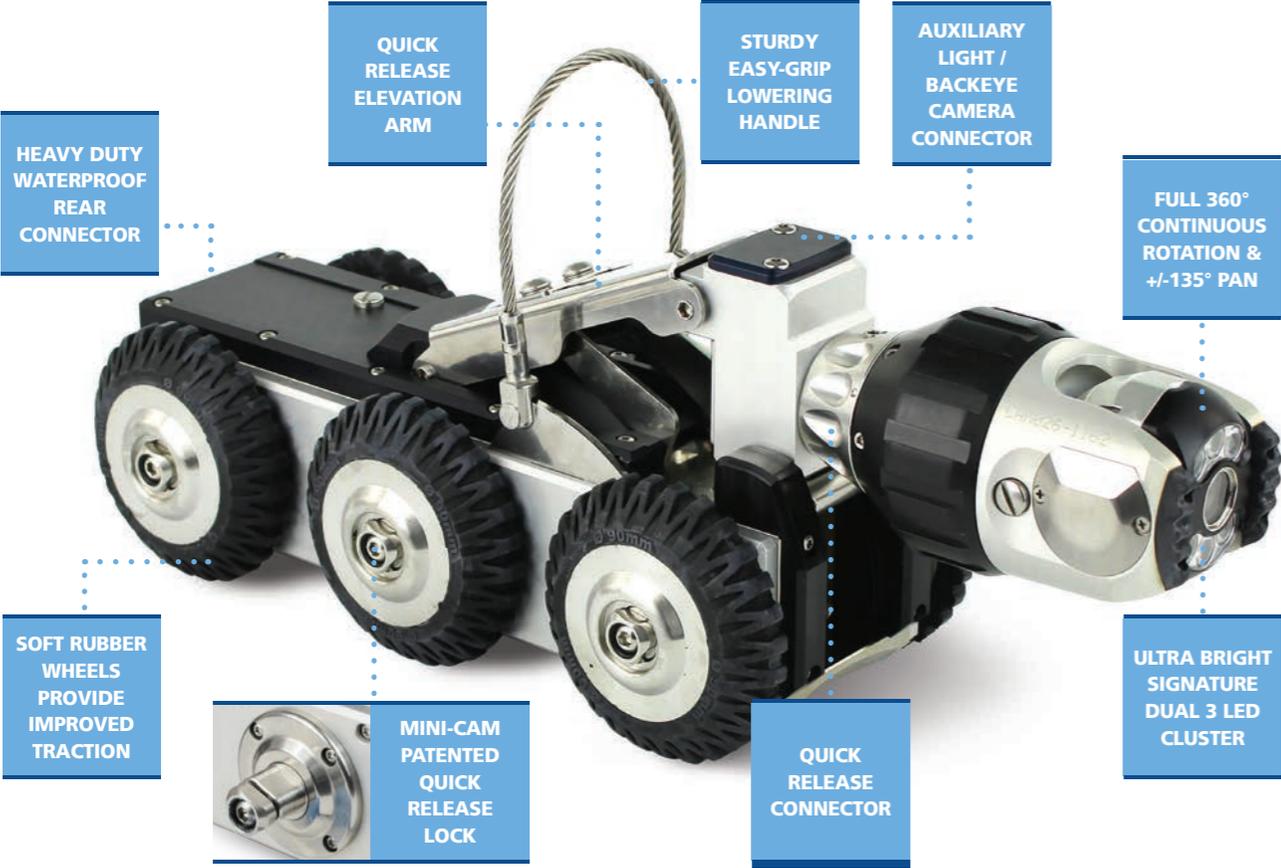

150mm dia
CPL150 with 90mm Wheels
Elevator Down

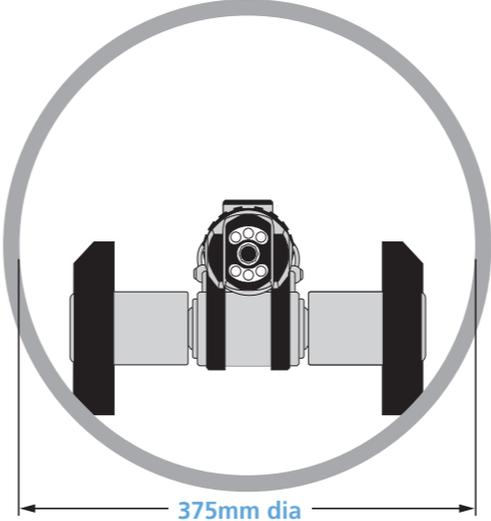

375mm dia
CPL150 with 140mm Extra Large Wheels
Elevator Fully Raised

The CPL150 crawler is the perfect companion to the RMPL250 Proteus Lite Cable Reel (see page 04), it has the same professional grade quality, reliability and accuracy that our customers expect from Proteus products. The crawler features a specially designed, manually operated quick release elevator arm, sturdy lowering handle and in-built connector for an optional auxiliary light or auxiliary light with backeye camera.

Mini-Cam's water resistant camera connectors and rear cable connectors come as standard, as does our quick release wheel lock, and soft rubber wheels (see page 21), engineered for improved traction. Built to perform reliably in harsh conditions, the modular configuration of the Proteus Lite system means CPL150 can be enhanced with cameras and accessories to extend its inspection capabilities.

Integration with additional Proteus wheels and accessories enables the CPL150 to be used for pipe inspections from 150mm upwards.



Quick Release Elevator



Raised Elevator



Lowering Handle



Heavy Duty Rear Connector



Optional Aux Light & Backeye Camera



Soft Rubber Quick Release Wheels


CAM026

Highest quality components are used in our camera designs, and our skilled technicians assemble and rigorously test the cameras at our UK production facility. Built for longevity the cameras are rugged, with robust and precise connectors, and are engineered to perform with excellent optical qualities.



PAN & ROTATE CAMERA

The Proteus Lite system comes complete with CAM026 as standard. This precision engineered Pan & Rotate camera features 360° rotation, +/- 135° pan and our signature dual three LED cluster of high powered ultra-bright lights, which provide optimum illumination for better image clarity.

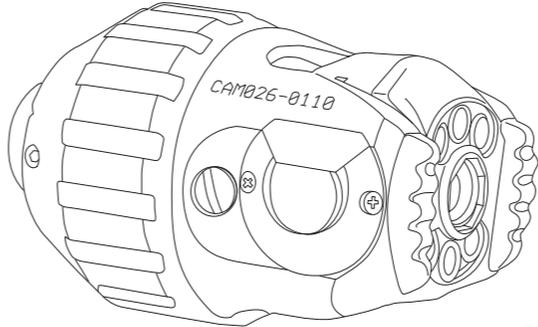

OPTIONAL CAMERAS FOR PROTEUS LITE



Axial CAM027



Aux Light & Backeye ALB300



Pan, Rotate & Zoom CAM028



CAM026 360° Rotate & +/- 135° Pan

ULTRA BRIGHT SIGNATURE DUAL 3 LED CLUSTER

FULL 360° CONTINUOUS ROTATION & +/- 135° PAN

HEAVY DUTY QUICK RELEASE CONNECTOR

MUCH MORE THAN MEETS THE EYE.

Feature rich, Mini-Cam's CCU208 Control Unit has twin integral joysticks for camera control and crawler manoeuvrability, and an ergonomic soft-touch keypad. User friendly multi-function hot keys control an intuitive on-screen display, to enable quick and accurate navigation of the numerous features which all come as standard on the brain of the Proteus Lite system.

Functionality at your fingertips.



FUNCTIONALITY AT YOUR FINGERTIPS

Use the Proteus Lite control unit to view, record and annotate inspection footage from any composite video source.

Control Meterage

Accurately set the meterage zero offset using the meterage key.

00.0

Sonde Settings

Set the frequency of the sonde transmitter to 33kHz, 512Hz or 640Hz.



Hot Keys

User friendly, multi-function hot keys control an intuitive on-screen display of the numerous features.



Survey Features

Access embedded reporting software to create detailed on-site reports




Generate Reports

Use ProPIPE+ Reporting software to create a detailed inspection report with a pipe graph to pinpoint defects.

PDF

Internal Batteries

The Proteus Lite CCU includes internal batteries so that it can be used autonomously to view inspection reports and video.



Setup & Configure Preferences

Easily and quickly configure the Proteus CCU to your specific requirements using the various menu options. Set language, date and time; establish file formats and naming conventions; adjust camera parameters; choose interface theme, enable power saving options and update firmware.



Capture Footage

Record MPEG video and JPEG images, and zoom up to 3X on video playback.




Write Screen Text

Type and store up to 16 pages of on-screen text. Customize text colour, position and background colour.

T

16

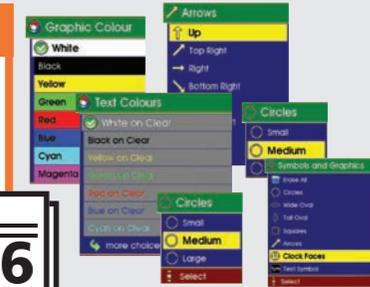

Joystick Controls

The left hand joystick controls crawler direction. Movement of the Pan & Rotate camera is smooth and effortless using the right hand joystick control. Perform a 360° endless rotation and pan the camera +/- 135°.



Share Files

WiFi enabled to allow remote access to stored images and data. Users can instantly share PDF reports, images and footage via email, or upload WinCan Reports via the Cloud to WinCan Web for secure, immediate team-wide access online.



Illumination

Increase or decrease the intensity of the ultra-bright camera LEDs

Alternative Languages

Proteus is currently available with keyboards in English, French, German and Russian



Screens Intensity

The brightness, colour and backlight intensity of the internal display can be adjusted to suit the environment in which the system is being used.



Review Footage

Organize videos and images into folders, then find them using the thumbnail gallery. Review media using standard controls.



Offload Data

Copy reports, video and images to USB or SDHC media for easy transfer to PC and seamless integration with WinCan reporting and querying capabilities.



REPORTING SOFTWARE

ProPIPE+ reporting software, developed by our in-house team of software engineers, enables accurate inspection of sewers with easy post-processing of inspection data. The current version generates PDF files and allows users to create professionally presented, detailed reports with illustrated pipe diagrams and screen shots, and also features a file sharing feature (see opposite).

Uncomplicated and efficient, ProPIPE+, WinCan Embedded and WinCan Web software is pre-installed as standard on the Proteus Lite control unit, giving the user the ability to perform comprehensive inspection reports on site and instantly share them with colleagues and customers. This gets the results to the client faster, making your business ultra efficient, reducing your administration costs and eliminating those long hours in the office.

Mini-Cam's Proteus Lite control unit is WiFi enabled to allow remote access to stored images and data. Users can simply drag and drop files from control unit to PC, or upload to the Cloud directly on-site. ProPIPE+ doesn't require any additional software to view reports on a PC, simply open the file in Microsoft® Word.

ProPIPE+ and WinCan Embedded software comes pre-installed as standard on Proteus Lite systems



- SAVE TIME AND MONEY
- CREATE A FULL REPORT INSTANTLY, ON-SITE
- ABILITY TO CREATE CUSTOMER SPECIFIC REPORT TEMPLATES
- GENERATE PDF REPORTS
- RE-DESIGNED PAGES FOR EASIER READING
- DETAILED PIPE DIAGRAM PINPOINTS DEFECTS
- SHARE FILES VIA EMAIL



- DATABASE CAPABILITIES
- WRc3, WRc4 & WRc5 COMPLIANCE
- GIS INTEGRATION
- ADVANCED TECHNOLOGY MODULES
- ENHANCED REPORTING
- SUPPORT FOR NETWORK INSTALLATION
- SUPPORT FOR ENTERPRISE DATABASE (Oracle, SQL)



- SHARE FILES WITH COLLEAGUES AND CUSTOMERS
- SHARE PDF REPORTS, IMAGES AND FOOTAGE VIA EMAIL
- UPLOAD WINCAN REPORTS VIA THE CLOUD TO WINCAN WEB



YouTube View ProPIPE+ video footage on our YouTube Channel **MinicamTubeUK**



PORTABLE STORAGE TROLLEY

Complete mobility for your Proteus Lite system

Eliminate health hazardous lifting, and time consuming carrying to your remote work site. Engineered to allow for the mobile operation of your Proteus Lite inspection system in difficult to reach areas, such as inside buildings, or other situations a distance away from your vehicle.

The trolley securely holds everything you need to efficiently undertake your pipeline inspection; control unit, reel, battery pack and accessory case. Simply wheel the unit to your location, connect a camera and crawler, and you're up and running in minutes.

The added convenience of Mini-Cam's unique Proteus Power Pack (see page 19), means there's no need to rely on generator or mains power. The power pack enables pipeline inspection in the most remote locations with up to 5 hours* inspection time.



Technical Specifications

Product Code	PTP04
Compatibility	Proteus Lite
Dimensions W x H x D mm	680 x 1170 x 740
Weight (unladen)	16.4kg

Please Note: Equipment shown on trolley NOT included with PTP04 *Battery life dependant on operating conditions.

CABLE GUIDE PULLEY

For smooth guiding of inspection cable during survey

Reduces wear by preventing kinks and chaffing, and assists in the smooth guiding of inspection cable during your survey. Comes complete with 12metres of rope and features a quick release mechanism to aid feeding the cable through the rollers.



Technical Specifications

Product Code	CGP01
Dimensions L x W x H	485 x 75 x 105mm
Rope Length	12metres
Weight (inc rope)	2.8kg

CCU TILTING TABLE

Customise the CCU position to suit the needs of the user

Quick and easy to attach, the Tilting Table allows adjustment of the control unit position, to give the user optimal screen viewing and keyboard positions. The table can be tilted 35° forwards and 75° backwards, with a full unobstructed 360° horizontal rotation. No tools are required, simply attach using the adjustable clamps.



Technical Specifications

Product Code	TTC01
Dimensions LxWxH	350 x 300 x 270mm
Weight	3kg

COMPATIBLE COILER

Push rod coiler CCP60R with removable self levelling camera head. Designed to plug directly into the Proteus Lite CCU. Also available as CCP60D (Duo) allowing the Pan & Rotate camera (CAM026) supplied with the Proteus Lite crawler to be attached. Robust construction with a powder coated finish. Can be used autonomously with the CCU on internal batteries.

AVAILABLE WITH 60 METRE OR 100 METRE ROD LENGTHS



A – Compatible Coiler with Pan & Rotate Camera CCP60/ CAM026 **B – Compatible Coiler with Axial Camera CCP60R/ CAM025**

Technical Specifications	
Product Codes	CCP60/CCP100
Temperature Range	-20°C ~ +50°C
Dimensions H x W x D	890 x 360 x 690mm
Weight (without CCU)	21.3kg
Environmental Protection	IP54

PROTEUS POWER BATTERY PACK

Portable power... where will it take you?

No need to rely on vehicle or mains power. Mini-Cam's unique Proteus Power Battery Pack enables pipeline inspections in the most remote locations with in excess of 5 hours inspection time*. The rugged pack is quick and



easy to connect and features output short circuit protection and LED charge status indication, It is charged using the standard Proteus power supply unit.



Please Note: Charging unit shown above for illustration only, not included with Proteus Power Pack. Charging Unit purchased separately. *Battery life dependant on operating conditions.

Technical Specifications	
Product Code	BPP24
Dimensions L x W x H	280 x 100 x 120mm
Weight	4kg
Optional	Carry Case

Dangerous goods shipping conformity required - please contact us for details



View on our YouTube Channel [MinicamTubeUK](#)



OPTIONAL EASY ACCESS CARRY CASE

CRAWLER CRADLE

Improved inspection capabilities

The crawler cradle adapts Mini-Cam's CPL150 and CRP140 crawlers for use in large diameter pipes. Versatile, quick and easy to attach, the cradle provides extra ground clearance enabling improved inspection capabilities in pipes and culverts up to 1000mm in diameter.

This robust, steerable, 4-wheel drive cradle is driven by the crawler, and features a unique gear selector, enabling the user to change between high speed and high torque operation. Exclusively compatible with Proteus CPL150 and CRP140 crawlers, PCC01 comes supplied with four 220mm balloon wheels.

You Tube

View on our
YouTube Channel
MinicamTubeUK



For heavily silted pipes we recommend the optional 250mm Balloon Wheel (QRW250/140/150), which are also required to centralise the crawler in 1000mm pipes.



ACCESSORIES



UNIQUE GEAR SELECTOR



Technical Specifications

Product Code	PCC01
Compatibility	CRP140/CPL150
Dimensions L x W x H	410 x 265 x 220mm
Weight	7.6kg
Fixings	2 Axle Adaptors & Bolts

CRAWLER WHEELS

Our specially designed wheels offer significant performance benefits in various pipe diameters and for specific operating conditions.

SOFT BLACK RUBBER

Black, soft rubber tyres developed to provide improved traction in regular pipes.

Available in four sizes and Wide Axle



IMPROVED TRACTION



CARBIDE

Fragmented copper particles fused to an heavy duty stainless steel body.

Available in four sizes and Wide Axle



FOR PLASTIC PIPES



EXTRA WIDE

Extend the capability of your crawler. Quick and easy to attach, wide axle wheels provide instant extra width for inspections in wider pipe diameters.

Available in Soft Rubber, Carbide and High Grip




HIGH GRIP

Hard wearing carborundum manufactured with a deep bevel profile to provide improved traction in wet and greasy pipes.

Available in three sizes and Wide Axle



FOR WET & GREASY PIPES



PNEUMATIC BALLOON

Heavy duty, 250mm wide tyres designed to improve performance on our large Proteus CRP300 crawler. Optional for Crawler Cradle PCC01.

Available in one size and Wide Axle



RUGGED HEAVY DUTY

QUICK RELEASE LOCK

Proteus crawlers feature Mini-Cam's unique, patented wheel lock device. This makes it easy to change the crawler wheel type to suit the size and condition of the pipe. Using the supplied 4mm Hex T-Bar driver, the operation is quick and simple with no other tools required.



You Tube View the Changing Wheels "HOW-TO" video at **MinicamTubeUK**

PROTEUS LITE

SPECIFICATION

CCU208 CONTROLLER	Video Format	PAL	<input checked="" type="checkbox"/>
	Battery	Lithium-Ion (CCU stand alone) 6 hours	<input checked="" type="checkbox"/>
	Battery	Lithium-Ion (CCU and Comp Coiler) 3 hours	<input checked="" type="checkbox"/>
	Charging	Mains power (100-240 Vac) or vehicle power (12 or 24 VDC) using supplied adaptors	<input checked="" type="checkbox"/>
	Display	10.4" XGA (1024 x 768 pixels) Sunlight viewable	<input checked="" type="checkbox"/>
	Keyboard	Full QWERTY ^a style membrane keyboard with arrow keys for navigation and separate joysticks for camera and crawler control.	<input checked="" type="checkbox"/>
	Video Recording	MPEG4 (WinCan compatible)	<input checked="" type="checkbox"/>
	Image Capture	JPEG (live or from recorded video)	<input checked="" type="checkbox"/>
	Text Overlay	16 page (selectable text and colours)	<input checked="" type="checkbox"/>
	Internal Memory	32 GB (expandable to 128 GB)	<input checked="" type="checkbox"/>
	External Media	SDHC and USB 2.0 Memory Stick	<input checked="" type="checkbox"/>
	Language Support	Multiple	<input checked="" type="checkbox"/>
	Connections	Power and Cable Reel	<input checked="" type="checkbox"/>
Environmental Rating	IP54	<input checked="" type="checkbox"/>	
Weight	5.5 kg		
Dimensions (W x H x D)	430 x 280 x 150		

RMPL250 REEL	Construction	Welded Steel	<input checked="" type="checkbox"/>
	Finish	Powder Coated	<input checked="" type="checkbox"/>
	Distance Counter Units	Feet, Metres	<input checked="" type="checkbox"/>
	Controls	Friction Brake	<input checked="" type="checkbox"/>
	Weight	29.3kg	
Dimensions	550 x 385x 700 (L x W x D)		

CPL150 CRAWLER	Pipe Diameter	150mm and larger	<input checked="" type="checkbox"/>
	Pressure Depth Rating	1 bar (14.50psi)	<input checked="" type="checkbox"/>
	Built-in Elevator	Manual	<input checked="" type="checkbox"/>
	Quick Change Wheel Lock		<input checked="" type="checkbox"/>
	Optional Large Wheels	4 size options (see page 20)	<input type="checkbox"/>
	Multi-Frequency Sonde Transmitter		<input type="checkbox"/>
	Inclination Sensor		<input type="checkbox"/>
	Heavy Duty Connector		<input checked="" type="checkbox"/>
Weight	9.25 kg		
Dimensions (L x H x W)	320 x 85 x 100mm		

- Standard
- Optional
- ^a Alternative languages available (details on request)

CAM026 PAN & ROTATE	Sensor	1/4" colour CCD with DSP	<input checked="" type="checkbox"/>
	Effective pixels	512 x 582	<input checked="" type="checkbox"/>
	Resolution	470 HTVL	<input checked="" type="checkbox"/>
	Sensitivity	< 1.0 Lux	<input checked="" type="checkbox"/>
	Aperture / field of view	F2.5 / 75°	<input checked="" type="checkbox"/>
	Image Orientation	Auto-levelling	<input checked="" type="checkbox"/>
	Size	74mm (2.9in) dia	<input checked="" type="checkbox"/>
	Illumination System	6 LED	<input checked="" type="checkbox"/>
	Illumination intensity	Adjustable (to 12.5K Lux at 150mm)	<input checked="" type="checkbox"/>
	Construction	Aluminium / Stainless steel	<input checked="" type="checkbox"/>
Pipe compatibility	150mm (6") and larger	<input checked="" type="checkbox"/>	
Pipe adaptor kit	6" / 8" Skids	<input checked="" type="checkbox"/>	

SOFTWARE	ProPIPE+ Reporting	<input checked="" type="checkbox"/>
	WinCan Embedded	<input checked="" type="checkbox"/>
	WinCan Web	<input checked="" type="checkbox"/>

ACCESSORIES	Reel-to-CCU cable	<input checked="" type="checkbox"/>	
	Vehicle power adaptor	<input checked="" type="checkbox"/>	
	Mains power adaptor	<input checked="" type="checkbox"/>	
	Memory	8 GB USB Memory stick / 8 GB SDHC card	<input checked="" type="checkbox"/>
	Accessory case	with Centering Skids	<input checked="" type="checkbox"/>
Mini-Cam Lanyard	<input checked="" type="checkbox"/>		

OPTIONAL ACCESSORIES	Memory Card upgrade	16MB / 32MB	<input type="checkbox"/>
	Cable Guide Pulley	Product Code: CGP01	<input type="checkbox"/>
	CCU Tilt Table	Product Code: TTC01	<input type="checkbox"/>
	Battery pack	Product Code: BPP24	<input type="checkbox"/>
	Crawler Cradle	Product Code: PCC01	<input type="checkbox"/>
	Proteus Wheels	see page 20	<input type="checkbox"/>
	Compatible Coiler	Product Code: CCP60/CCP100	<input type="checkbox"/>
	Roller Skids	130mm / 180mm (for use with Comp Coiler)	<input type="checkbox"/>
All Terrain Wheels	Product Code: SPP-ATA (for use with Comp Coiler)	<input type="checkbox"/>	



HOW TO FIND US



CONTACT INFORMATION

Head Office & Production

Postal Address
Mini-Cam Limited
Unit 4, Yew Tree Way, Stonecross Park, Golborne, Warrington, Cheshire, WA3 3JD, United Kingdom

Switchboard
Telephone +44 (0) 1942 444555
Facsimile +44 (0) 1942 273735

Hours of Business
Mon - Thur 8.00am - 5.00pm • Fri 8.00am - 3.45pm
Saturday & Sunday Closed

Service Enquiries

Email service@minicam.co.uk

UK Sales Manager

Email greg.guest@minicam.co.uk

UK (Northern) Sales

Email paul.crane@minicam.co.uk

UK (Southern) Sales

Email clive.flegg@minicam.co.uk

International Sales

Email sven.breitenfeld@minicam.co.uk



Demonstration Showroom & Custom Van Fits

5 minute drive from our Head Office

Postal Address
Mini-Cam Limited
Innovation House, Unit C, Kirkstead Way, Golborne, Warrington, WA3 3PY, United Kingdom

Telephone +44 (0) 1942 444555

Custom Van-Fits Enquiries

Email greg.guest@minicam.co.uk

Mini-Cam Ltd. Registered in England & Wales No.3728693. Registered Office: Unit 4, Yew Tree Way, Stonecross Park, Golborne, Warrington, WA3 3JD.
VAT Registration No. GB 218 688 471 ©2019 Mini-Cam Ltd. All rights reserved. Proteus, ProPIPE+ and Mini-Cam names and logos are trademarks of Mini-Cam Ltd.
WinCan Embedded and WinCan Web name and logo are trademarks of CD-Lab and used under licence. Specifications subject to change without notice. Images for illustration purpose only.

Discover more InPipe Innovation at
minicam.co.uk



Mini-Cam Limited
Unit 4, Yew Tree Way
Stonecross Park
Golborne
Warrington
WA3 3JD
United Kingdom

Tel: +44 (0) 1942 444555
Email: info@minicam.co.uk
www.minicam.co.uk



A HALMA COMPANY

DESIGN 042019

